





数据接口




2032电池

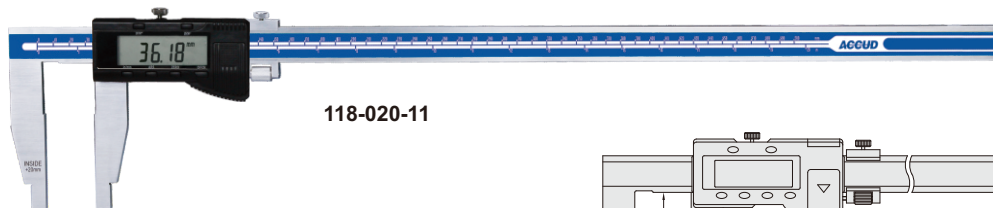


118-020-11

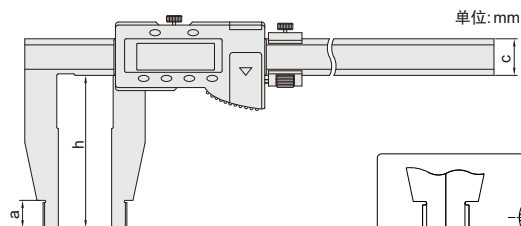


单位: mm



内径测量尺寸=读数值+20mm



外径测量

内径测量
(测量尺寸>20mm)

货号	量程	精度	a	c	h
118-012-11	0-300mm/0-12"	±0.04mm	18	24	100
118-012-12	0-300mm/0-12"	±0.05mm	18	24	150
118-012-13	0-300mm/0-12"	±0.05mm	18	24	200
* NEW 118-018-11	0-450mm/0-18"	±0.05mm	18	24	100
118-020-11	0-500mm/0-20"	±0.05mm	18	24	100
118-020-12	0-500mm/0-20"	±0.06mm	18	24	150
118-020-13	0-500mm/0-20"	±0.06mm	24	32	200
118-020-14	0-500mm/0-20"	±0.08mm	24	42	300
118-024-11	0-600mm/0-24"	±0.05mm	18	24	100
118-024-12	0-600mm/0-24"	±0.06mm	18	24	150
118-024-13	0-600mm/0-24"	±0.06mm	24	32	200
118-024-15	0-600mm/0-24"	±0.08mm	24	42	300
118-032-11	0-800mm/0-32"	±0.07mm	24	32	150
118-040-11	0-1000mm/0-40"	±0.08mm	24	32	150
118-040-12	0-1000mm/0-40"	±0.08mm	24	32	200
118-040-13	0-1000mm/0-40"	±0.10mm	24	42	300
* NEW 118-048-11	0-1200mm/0-48"	±0.11mm	24	42	150
118-060-11	0-1500mm/0-60"	±0.11mm	24	42	150
* NEW 118-060-12	0-1500mm/0-60"	±0.12mm	24	42	200
* NEW 118-080-11	0-2000mm/0-80"	±0.14mm	24	42	150
118-080-12	0-2000mm/0-80"	±0.14mm	24	42	200

- ◆ 符合JJG通用卡尺国家计量检定规程, 200mm及300mm爪长符合JB/T长量爪卡尺国家机械行业标准
- ◆ 分辨率: 0.01mm/0.0005"
- ◆ 按键: 开/关机, 置零, 公/英制转换, 绝对/相对测量, 预置初始值
- ◆ 带数据输出(数据线货号:100-15)
- ◆ 不锈钢尺身