

数显齿轮千分尺


304系列



- ◆ 符合企业标准
- ◆ 用于测量齿轮跨棒距
- ◆ 分辨率: 0.001mm/0.00005"
- ◆ 防尘/防水等级: IP65
- ◆ 按键: 开关, 初始值设置, 公/英制转换, 相对/绝对测量转换
- ◆ 数据输出(数据线货号: 300-03 或 300-04)
- ◆ 自动关机
- ◆ 棘轮测力
- ◆ 配标准杆(除**304-001-01**外)
- ◆ 可选附件: 球测头(货号345-000-XX系列)



304-002-01

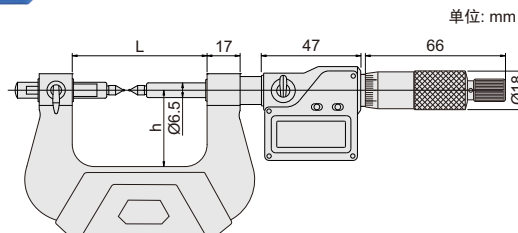


单位: mm

货号	量程	微分头精度	L	h	标准杆(标配)
304-001-01	0-25mm/0-1"	±4μm	67	38	-
304-002-01	25-50mm/1-2"	±4μm	92.4	50	25mm
304-003-01	50-75mm/2-3"	±5μm	117.6	62	50mm
304-004-01	75-100mm/3-4"	±5μm	143	70	75mm
304-005-01	100-125mm/4-5"	±6μm	168.2	82	100mm
304-006-01	125-150mm/5-6"	±6μm	192	94.5	125mm
304-007-01	150-175mm/6-7"	±7μm	217	107	150mm
304-008-01	175-200mm/7-8"	±7μm	242	130	175mm
304-009-01	200-225mm/8-9"	±8μm	267	142.5	200mm
304-010-01	225-250mm/9-10"	±8μm	292	155	225mm
304-011-01	250-275mm/10-11"	±9μm	317	167.5	250mm

* **NEW**
* **NEW**
* **NEW**
* **NEW**


测头安装



标准杆(标配)



测量



千分尺