




313-001-01C

- ◆ 符合JJG外径千分尺国家计量检定规程
- ◆ IP65 防护等级
- ◆ 按键功能: 开/关机/置零, 公英制转换/绝对/相对测量转换
- ◆ 自动关机
- ◆ 硬质合金量面, 棘轮测力
- ◆ 配标准杆(313-001-01C除外)

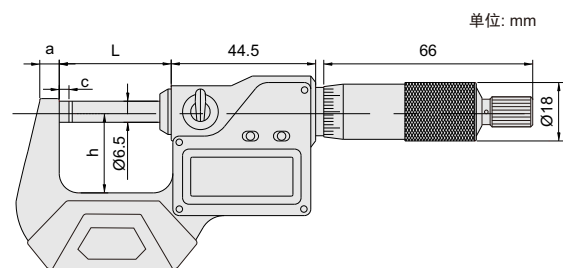


单位: mm

标准杆(标配)



球测头(标配)



测量壁厚

千分尺

货号	量程	分辨率	精度	a	c	h	L	标准杆(标配)
313-001-01C *	0-25mm/0-1"	0.001mm/0.00005"	±2μm	6	3	25	34.5	-
313-002-01C *	25-50mm/1-2"	0.001mm/0.00005"	±2μm	8	3	32	59.5	25mm
313-003-01C *	50-75mm/2-3"	0.001mm/0.00005"	±3μm	8	3	44.5	84.5	50mm
313-004-01C *	75-100mm/3-4"	0.001mm/0.00005"	±3μm	8	3	57	109.5	75mm
313-005-01C	100-125mm/4-5"	0.001mm/0.00005"	±3μm	10	3	70	135	100mm
313-006-01C	125-150mm/5-6"	0.001mm/0.00005"	±3μm	10	3	82	160.5	125mm
313-007-01C	150-175mm/6-7"	0.001mm/0.00005"	±4μm	12	5.5	94.5	186	150mm
313-008-01C	175-200mm/7-8"	0.001mm/0.00005"	±4μm	12	5.5	107	211.5	175mm
313-009-01C	200-225mm/8-9"	0.001mm/0.00005"	±4μm	23	5.5	129.5	236	200mm
313-010-01C	225-250mm/9-10"	0.001mm/0.00005"	±4μm	23	5.5	142.5	261.5	225mm
313-011-01C	250-275mm/10-11"	0.001mm/0.0001"	±5μm	23	5.5	155	287	250mm
313-012-01C	275-300mm/11-12"	0.001mm/0.0001"	±5μm	23	5.5	167.5	312.5	275mm

* NEW
* NEW
* NEW
* NEW

套装

货号	量程	数量	包含千分尺的量程	包装
313-003-03C *	0-75mm/0-3"	3个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3"	吹塑盒
313-004-04C *	0-100mm/0-4"	4个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4"	吹塑盒
313-006-06C	0-150mm/0-6"	6个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4", 100-125mm/4-5", 125-150mm/5-6"	铝盒

* 带生产厂检验证书