








- ◆ 符合JJF内径表国家计量技术规范
- ◆ 带最小值测量功能,可自动寻找被测直径
- ◆ 可选配校对环规531系列



对零器对零(选配)  
255/256系列(需另外购买)

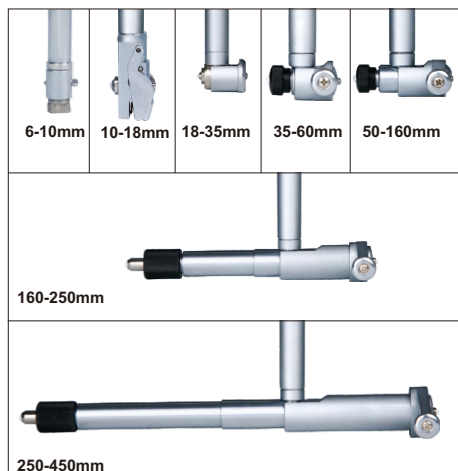

校对环规(选配)  
531系列(需另外购买)

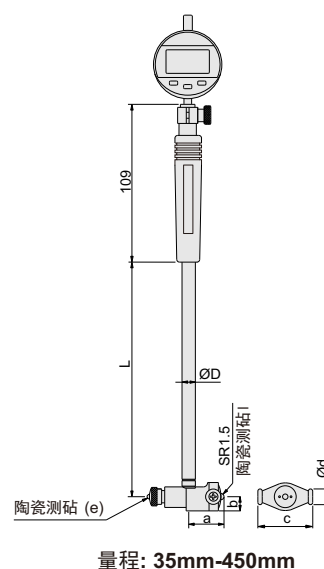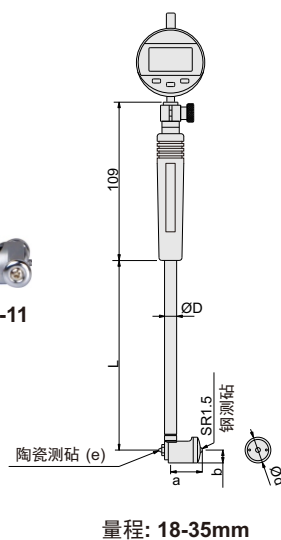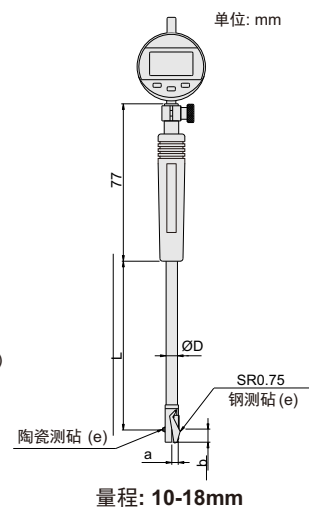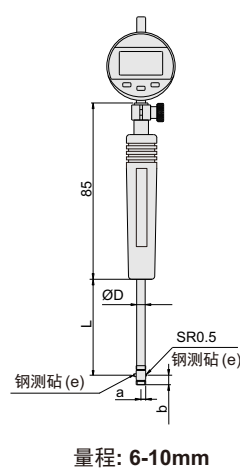


可换测头(标配)



垫片(标配)



测头安装

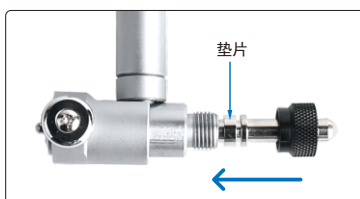

| 货号         | 量程        | 数显表头                       | 可换测头  | 垫片   | 精度       | 重复性 | a    | b   | c     | Ød   | ØD   | e   | L   |
|------------|-----------|----------------------------|-------|------|----------|-----|------|-----|-------|------|------|-----|-----|
| 241-010-11 | 6-10mm    | 量程: 12.7mm<br>分辨率: 0.002mm | 9pcs  | 2pcs | ±0.012mm | 3µm | 3.6  | 5.7 | /     | /    | 4.5  | R1  | 48  |
| 241-018-11 | 10-18mm   |                            | 9pcs  | 2pcs | ±0.012mm | 3µm | 5.6  | 7.8 | /     | /    | 6    | SR1 | 105 |
| 241-035-11 | 18-35mm   |                            | 9pcs  | 2pcs | ±0.015mm | 3µm | 12.2 | 6.4 | /     | 12.7 | 9    | SR1 | 141 |
| 241-060-11 | 35-60mm   |                            | 6pcs  | 4pcs | ±0.018mm | 3µm | 12.2 | 9   | 27    | 13   | 12.8 | SR2 | 141 |
| 241-100-11 | 50-100mm  |                            | 11pcs | 4pcs | ±0.018mm | 3µm | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-160-11 | 50-160mm  |                            | 12pcs | 4pcs | ±0.018mm | 3µm | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-160-12 | 100-160mm |                            | 12pcs | 4pcs | ±0.018mm | 3µm | 26   | 9   | 35    | 13   | 12.8 | SR2 | 141 |
| 241-250-11 | 160-250mm |                            | 5pcs  | 5pcs | ±0.018mm | 3µm | 56.5 | 13  | 74.5  | 15   | 14.5 | SR2 | 400 |
| 241-450-11 | 250-450mm |                            | 5pcs  | 5pcs | ±0.018mm | 3µm | 86.5 | 15  | 101.5 | 15   | 14.5 | SR2 | 400 |